



RCA

"RCA"系列柱式传感器



不锈钢模拟柱式传感器, 精度4000d, 广泛应用于汽车衡系统, 配有"防鼠"屏蔽电缆。

量程 (kg): 30000.

不锈钢 IP68 C4精度

规格参数

- C4精度
- 不锈钢结构
- IP68
- 量程30000 kg
- 配20m“防鼠”屏蔽电缆
- 可选检测证书

性能参数


- 灵敏度:2mV/V +/- 0.1%
- 综合误差:± 0.017%
- 工作温度:-20°C/+60°C
- 输入阻抗:815 ± 20 Ohm
- 输出阻抗:700 ± 5 Ohm
- 安全过载:150% F.S.
- 4芯屏蔽电缆

防爆型号

- 若传感器配有CCATEX防爆证书, 则可以使用在爆炸性环境中, 防爆等级:
ATEX II 1G Ex ia IIC T6 (Ta -20÷+40°C) TX (Ta -20÷+65°C) Ga
ATEX II 1D Ex ta IIIC TX°C (Ta -20÷+40°C) TX°C (Ta -20÷+65°C) Da IP65.
此证书包含ATEX CE声明文件 (英文版、德文版、法文版或意大利文版)。
- 注意:需要为每一只防爆传感器各配一份防爆证书。

线缆定义	
颜色	定义
白	输出 +
红	输入 +
黄	输出 -
蓝	输入 -

产品详情 1

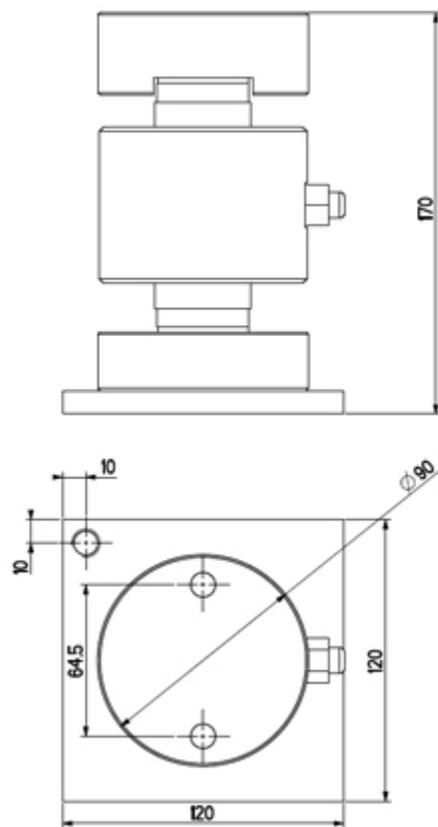

可选型号

可选型号

Code	Max (kg)
RCA30C4	30000



“YOUR WORLDWIDE PARTNER FOR WEIGHING”

DINI ARGEO
FRANCE sarl
Nogent-sur-Marne
info.fr@diniargeo.com

DINI ARGEO
GMBH
Sinsheim - Germany
info.de@diniargeo.com

DINI ARGEO
UK Ltd
Taunton - United Kingdom
info.uk@diniargeo.com

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China
info.cn@diniargeo.com

DINI ARGEO
WEIGHBRIDGES
Calto (RO) – Italy
info@diniargeo.com




HEAD OFFICE

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 843418 Fax. +39.0536 843521
info@diniargeo.com

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 921784 Fax. +39.0536 926654
service@diniargeo.com

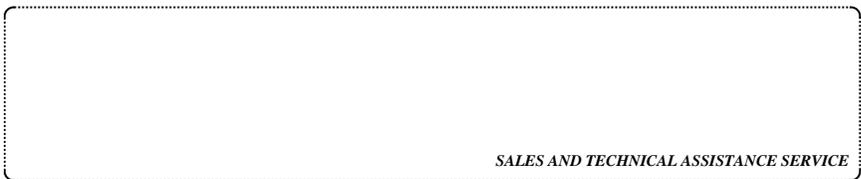

SALES AND TECHNICAL ASSISTANCE SERVICE